



PUMPING WATER

- ✓ AGRICULTURE
- ✓ AQUACULTURE
- ✓ RECLAMATION





MOBILE IMPELLER PUMP WITH CARDAN SHAFT OPERATION TP SERIES

The Pennacchio mobile pumps OF TP series are mainly used for direct irrigation of crops. Water can be taken from different sources to optimally exploit water resources. They can also be used to manage and convey large volumes of water. Pennacchio Pompe offers a full range of options for any of your needs. Practical and easy to transport, they guarantee great flexibility of use and high pumping performance even in case of low water pressure head.



TECHNICAL DATA AND CONSUMPTION AND FLOW RATE SPECIFICATIONS

MODEL	Rev/min RPM	Piping	Flow rate l/s	M ³ /h	Tractor power CV
TP 200	540	200	130	468	35
TP 250	540	250	220	792	40
TP 300	540	300	300	1080	60
TP 350	540	350	400	1450	75
TP 400	540	400	500	1800	90
TP 500	540	500	730	2620	130



Pennacchio Pompe offers you a wide range of mobile pumps

Hydraulic pump TP series



Telescopic pump TP series



Manual pump TP series



Manual pump with piston TP series

Oil bath transmission can be installed upon request

Also available in hot-dip galvanized version



MANUAL PUMP TP SERIES:

with manual rotation and third point lift, it guarantees smooth and easy operation, with coupling to the hydraulic lift of the tractor; the pipe is raised via a third mechanical point, while the delivery pipe can be adjusted exclusively by hand.

PUMP TP SERIES MANUAL WITH PISTON:

with manual rotation system and lift with hydraulic piston, it guarantees smooth and easy operation, with the coupling to the hydraulic lift of the tractor. Unlike the manual pump series, the pipe is lifted by a hydraulic actuator, while the delivery pipe can be adjusted manually.



HYDRAULIC PUMP TP SERIES:

with hydraulic rotation and lifting by hydraulic piston, it guarantees smooth and easy operation, with coupling to the hydraulic lift of the tractor; this pump can be used with great flexibility, both the lift and the delivery pipe are completely hydraulic, ensuring a more comfortable and practical operation.



HYDRAULIC PUMP WITH TELESCOPIC TUBE TP SERIES:

with hydraulic extension of the delivery pipe, it guarantees smooth and easy operation, with coupling to the hydraulic lift of the tractor, this pump features the same functions as the hydraulic one and is equipped with the hot-dip galvanized hydraulic telescopic tube with a 1.90 m extension, thus performing its main function in a more detailed and precise way.







After-sales support
Spare parts
Repairs at our
authorized workshop



SLURRY AGITATORS WITH CARDAN SHAFT OPERATION

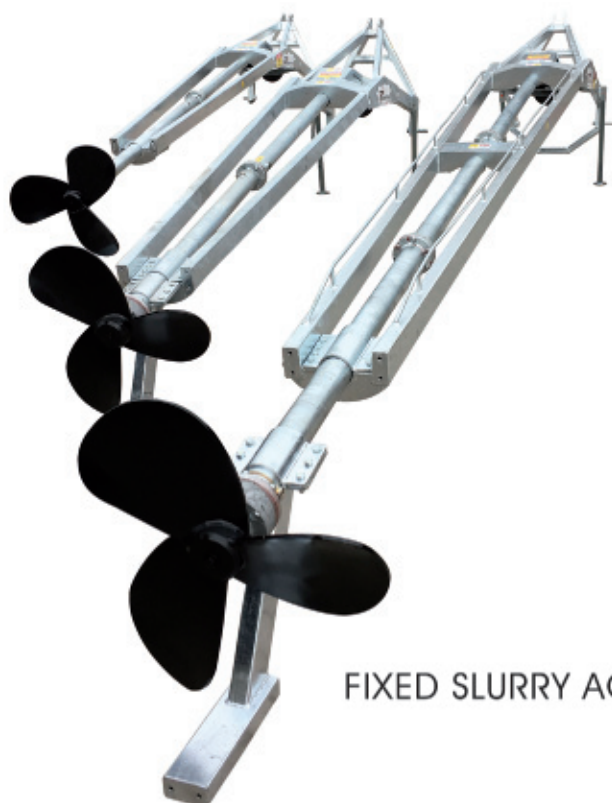

FIXED SLURRY AGITATOR

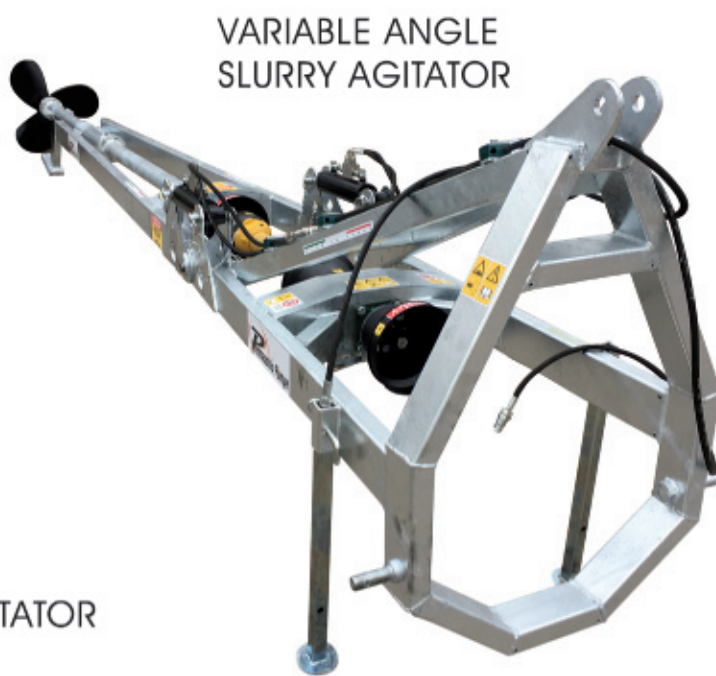

VARIABLE ANGLE
SLURRY AGITATOR

Fixed or variable angle slurry agitator

The agitator made by us is designed for mixing and fluidification of dense slurry, contained inside tanks or cisterns, and promotes the transfer of the same in the trailer. The structure is completely hot-dip galvanized, with oil bath transmission and WIDIA mechanical seal. The propeller located at the end of the machine serves as a mixing body. Thanks to the anchoring supports, it guarantees easy and strategic positioning on different tractor models. In addition, the slurry agitator is also available with variable angles and inclination of the frame adjustable by means of a hydraulic piston, depending on the work required.



Since 1980, water pumping made easy for you

PENNACCHIO POMPE SAS

di Giacomazzi Cristiano & C.

Via Tesoli, 3 - 25012 Calvisano (BS) Italy

Telefono: +39 030 99 88 958

pennacchiopompesas@gmail.com

www.pennacchiopompe.com

